



MB-HB-075-10T

MB-HB-075-10T

RATING

Power rating, kW / HP	55 / 75
Maximum Polished Rod Speed (RPM)	500
Thrust Bearing rating, ISO (kN / lbs)	720 / 161,970
Thrust Bearing rating, Ca90 (kg / lbs)	19,080 / 41,977
Maximum input torque (Nm / ft-lbs)	2,035 / 1,500
Maximum brake torque (Nm / ft-lbs)	4,050 / 2,985

STRUCTURAL

Belt guard	Fully enclosed hinged
Polished rod size, in.	1 1/4" or 1 1/2"
Wellhead connection	3 1/8" 3,000 psi R-31 Flange
Wellhead connection	4 1/16" 3,000 psi R-37 Flange
Drivehead Shaft	3 1/2" shaft diameter
Maximum Driven Sheave (OD-Type-Groove)	31.5 x 5V x 6
Overall Height (mm / inches)	1346 / 53
Drivehead Weight (kg / lbs)	390 / 860

BRAKING SYSTEM

Recoil control system Hydraulic Pump



OPTIONAL EQUIPMENT

Environmental Seal Integral (5 seals)
 Environmental Seal Booth (open)
 Rope Packing Seal
 Leak Detection System
 Tachometer

MAINTENANCE

Gear Oil - 75W90 SYN -40/+35C or 85W140 SYN >+36C
 (27 liters)

Frequency 6 - 12 months

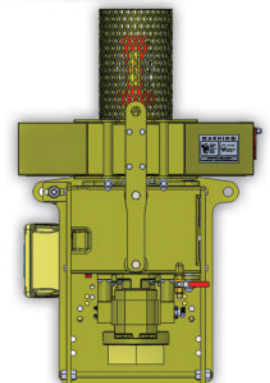

'CAUSE WE GIVE A SH!T